


SERVOTRONIC AB

Slipring SETH12-56 Datasheet

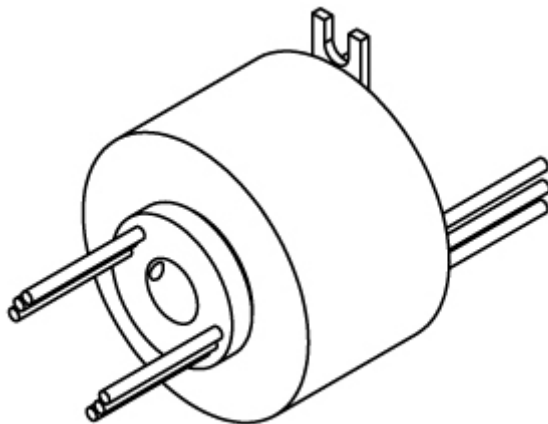

Parameters:

Mechanical :

Working speed	1000rpm
Operating temperature	-40°C~ +100°C
Contact material	Precious metal
IP Grade	IP 54

Electrical:

Circuit	6 ,12,18,24
Current	5A, 10A
Voltage	≤380V
Dielectric strength	≥1000V@50Hz between each circuit
Insulation resistance	1000MΩ@ 500VDC
Electric noise	≤7mΩ
Lead wire size	22AWG, 17AWG,UL, color Teflon, silver or tin plated
Lead wire length	200mm

SERVOTRONIC AB


Redaregatan 2
Box 175
731 24 Köping
Sweden

Phone: +46 (0)221 - 137 60
Fax: +46 (0)221 - 195 42

Email: info@servotronic.se
Web: www.servotronic.se

SERVOTRONIC AB

CAD Drawing:

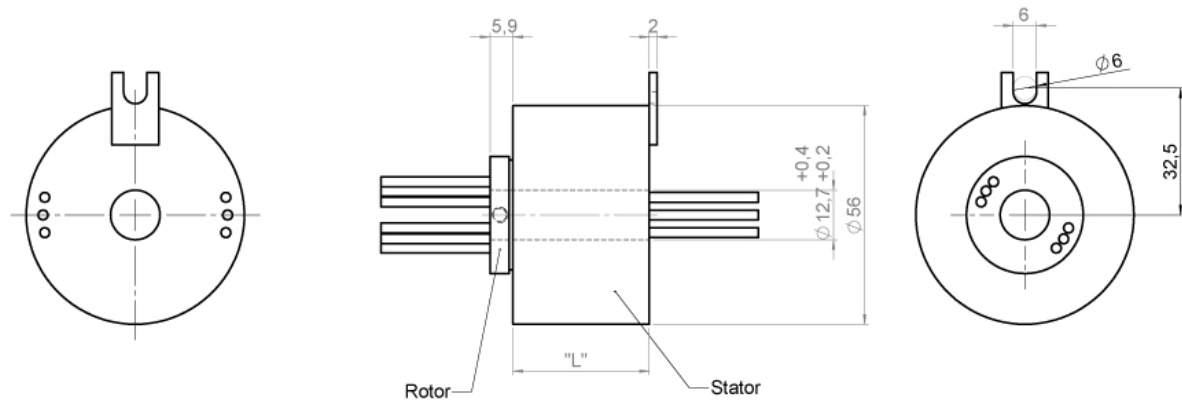

Critical Dimensions:

Model	Length "L"				
	Current	6 circuits	12 circuits	18 circuits	24 circuits
SETH12-56	5A	35 mm	48.8 mm	62.6 mm	76.4 mm
	10A	38 mm	54.8 mm	71.6 mm	88.4 mm

Customization is available, OEM&ODM is welcome!

SERVOTRONIC AB

Redaregatan 2
Box 175
731 24 Köping
Sweden

Phone: +46 (0)221 - 137 60
Fax: +46 (0)221 - 195 42

Email: info@servotronic.se
Web: www.servotronic.se